

«ILLICLÔT» TWO LEAVES GATE

The product

Illiclôt swing gate is a lightweight, ready-to-install bar gate suitable for all types of spaces. This range is quick and easy to install, making it suitable for fencing residential areas, individual and collective properties and some types of public space.

ILLICLÔT gates are available with bar or mesh filling (50x50 mesh).

These products are made from Sendzimir Z275 galvanised steel and powder coated (minimum 80 micrometers), giving them excellent corrosion resistance. The entire ILLICLÔT range complies with current European directives and meets EN 13241-1 standard.

Characteristics

Grey 7016 ● Green 6005 ● Other colours upon request ●


- 40 x 40 x 1.5 mm galva tube posts
- 20x20x1.5 mm square profile bars or 50x50 mm wire mesh
- 3 or 4 m clear opening
- To-seal posts
- Plastic caps
- Mortise lock - Reversible latch
- French opening - 110° maximum
- Stainless steel hinges for better adjustment

Pre-assembled model except lock (included)



Illiclôt gate base plate
Base 15x15x0,8cm - H30cm
Available in green 6005 or grey 7016

BARRED OR MESH GATE					
CLEAR OPENING (m)	ABOVE GROUND HEIGHT (mm)	POST HEIGHT (mm)	LEAF HEIGHT (mm)	LEAF WIDTH (mm)	POSTS (mm)
3	1000	1500	970	1455	80 x 80 x 2
	1200	1700	1170		
	1500	2000	1470		
	1750	2250	1720		
	2000	2500	1970		
4	1000	1500	970	1955	
	1200	1700	1170		
	1500	2000	1470		
	1750	2250	1720		
	2000	2500	1970		

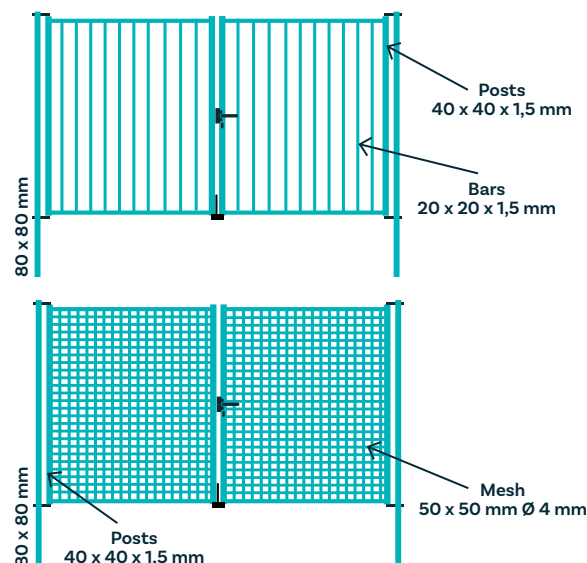

«ILLICLÔT» SIDE GATE

The product

Illiclôt side gate is a lightweight, ready-to-install bar gate suitable for all types of spaces. This range is quick and easy to install, making it suitable for fencing residential areas, individual and collective properties and some types of public space.

ILLICLÔT side gates are available with bar or mesh filling (50x50 mesh).

These products are made from Sendzimir Z275 galvanised steel and powder coated (minimum 80 micrometers), giving them excellent corrosion resistance.

The entire ILLICLÔT range complies with current European directives and meets EN 13241-1 standard.

Characteristics



Grey 7016 ● Green 6005 ● Other colours upon request ●

- 40 x 40 x 1,5 mm sendzimir tube posts
- 20 x 20 x 1,5 square profile bars or 50 x 50 mm wire mesh
- GBM12 reinforced stainless steel pivots
- To-seal posts
- Plastic caps - Stainless steel hinge
- Mortise lock - Reversible latch
- Ground bolt and screw-on shoe
- Screw-on lock strike

Pre-assembled model except lock (included)

BARRED SIDE GATE				
HEIGHT (m)	CLEAR OPENING (mm)	BARS (mm)	FRAME (mm)	POSTS (mm)
1	1000	20 x 20 center distance	40 x 40	60 x 60 x 1,5
1,25				
1,50				
1,75				
2				

MESH SIDE GATE				
HEIGHT (m)	CLEAR OPENING (mm)	MESH (mm)	FRAME (mm)	POSTS (mm)
1	1000	50 x 50 Ø 4	40 x 40	60 x 60 x 1,5
1,25				
1,50				
1,75				
2				

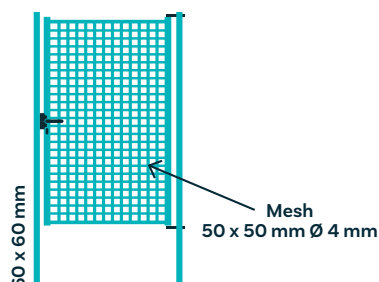

Illiclôt side gate base plate
Base 12x12x0,8cm - H30cm
Available in green 6005 or grey 7016

